

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/001181

International filing date: 24 March 2005 (24.03.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB  
Number: 0407511.5  
Filing date: 02 April 2004 (02.04.2004)

Date of receipt at the International Bureau: 09 May 2005 (09.05.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



PCT/GB2005/001181.



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed 

Dated 21 April 2005

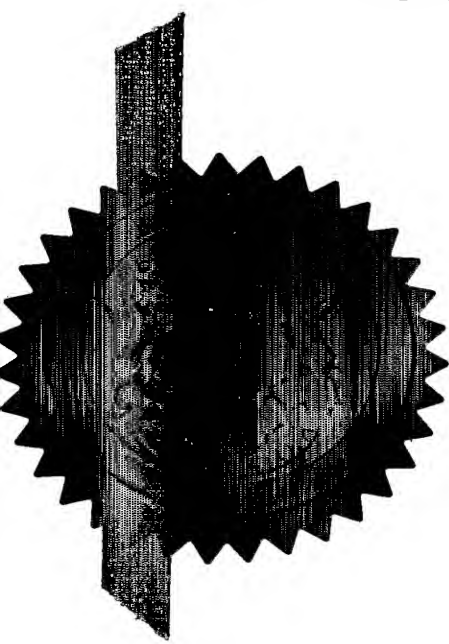



The  
Patent  
Office

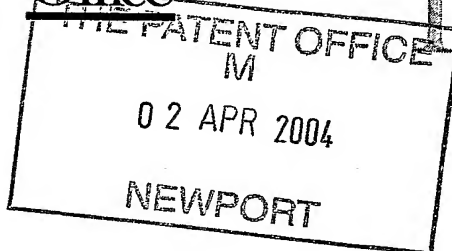

1/77

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference

IP/P7355

02 APR 2004

2. Patent application number

(The Patent Office will fill in this part)

0407511.5  
QINETIQ LIMITED

02APR04 E885989-1 D02776

P01/7700 0.00-0407511.5 ACCOUNT CHA

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Registered Office 85 Buckingham Gate  
London SW1E 6PD  
United Kingdom

Patents ADP number (if you know it)

8307431001

If the applicant is a corporate body, give the country/state of its incorporation

GB

4. Title of the invention IMPROVED MILLIMETRE WAVE ILLUMINATION SYSTEM

5. Name of your agent (if you have one)

Clarke Alan

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

QINETIQ LIMITED  
IP Formalities  
A4 Bldg  
Cody Technology Park  
Ively Road  
Farnborough  
Hants GU14 0LX United Kingdom

Patents ADP number (if you know it)

8183873001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number or earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body. See note (d))

Yes (b)

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description 13 ✓ *h*  
Claim(s) 2 ✓  
Abstract 1 ✓  
Drawing(s) 8 + 8 ✓

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*) 1 ✓

Request for preliminary examination and search (*Patents Form 9/77*) 1 ✓

Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(please specify)

11. I / We request the grant of a patent on the basis of this application.

Signature

A Clarke

Date

1.4.04

12. Name and daytime telephone number of person to contact in the United Kingdom

Mrs Linda Bruckshaw  
01252 392722

### Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent of the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

### Notes

- If you need help to fill in this form or have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have attached 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

## Improved Millimetre Wave Illumination system

5 This invention relates to systems and methods used for providing millimetre wave illumination of a scene. In particular, it relates to illuminators that are used primarily indoors, but also have utility in outdoor environments.

10 Systems capable of producing images of a scene based on millimetre wave radiation emitted from the scene are becoming more commonplace as the technology used in such systems matures. These imaging systems are able to detect the millimetre wave energy levels within a scene at a resolution fine enough to produce images of a quality suitable for many tasks. The images produced from such imagers effectively show the millimetre wave energy differences coming from different parts of the scene. To satisfactorily  
15 reproduce various elements of the scene there needs to be a sufficient illumination energy difference between these elements. If the system is being used outdoors then the energy difference between the sky, which appears cold and hence of low emissivity, and the scene, which will be typically at 270-300 Kelvin and hence of comparatively high emissivity, can be used to  
20 generate images having a good contrast. For indoor use, this is more of a problem, as typically all elements within the scene will be at a similar temperature.

25 In these circumstances it is normal to direct a source or sources of millimetre wave energy at the scene to be imaged, such that the scene may reflect some of this millimetre wave energy to the imager, and so distinguish the scene from its background. An illuminator designed for this purpose is disclosed in published PCT application, No. GB2003/001886. The illuminator disclosed therein provides a diffuse source of energy from a relatively large area, which  
30 results in a more even illumination of the scene being imaged, and helps to reduce problems such as glint and specular reflection, all of which are detrimental to the final image.

However, if the bandwidth of either the illuminator or the imager is small, then a speckle effect can sometimes be seen on the image. This can be detrimental to the overall image.

- 5 The object of the present invention is to at least alleviate the problems identified with the prior art:

According to the present invention there is provided a millimetre wave illumination system comprising:

- 10 at least one primary source of mm-wave radiation for emitting mm-wave radiation in at least one radiation field state;  
a baffle comprising a non transmissive surface and having positioned therein a plurality of transmissive exit apertures;  
a surface reflective at millimetre wavelengths for inducing a plurality of  
15 radiation paths between the source and the baffle;  
characterised in that the system further incorporates means for generating a plurality of radiation field states in a pre-determined time interval.

- 20 The reflective surface is arranged such that at least a part of the radiation exiting the primary source will be reflected from the reflective surface before exiting through the exit apertures.

- 25 The speckle effect observed with the prior art has been found to be caused by a noise-like spatial variation in the output power from the illuminator. This variation tends to remain temporally static, and so presents an uneven illumination to the scene. This is believed to be caused by the radiation exiting from the various exit apertures of the baffle at fixed, but essentially random phases, combining to produce a radiation pattern in a similar manner to a large phased array antenna where the phase of each element is set  
30 randomly.

The problem has been found to become more pronounced as the bandwidth of the illumination system, or an imaging system using such illuminators,

reduces. Of course, if the imaging system uses a narrower bandwidth than that produced by the illumination system, then the energy produced by the illumination system outside of the imaging system bandwidth will play little part in the imaging process.

5

As the bandwidth is reduced the coherence of the radiation emitted from the exit apertures tends to increase, which in turn increases the amount of spatial variation in output power of the illuminator. Conversely, at larger bandwidths, the spatial variation in output power of the illuminator decreases. This can be understood by notionally regarding a wide bandwidth output as a set of different narrow bandwidth outputs. As the spatial variations at each bandwidth will be different, the integration of several such outputs tends to result in an averaging, or smoothing of the overall output from the illuminator.

10

15

At lower bandwidths, the applicant has realised that by generating a plurality of different radiation field states as defined herein within a pre-determined time interval the amount of spatial variation in output power seen by an associated imager is reduced. The plurality of different modes may be generated by disturbing the electromagnetic field pattern before the radiation has exited the exit apertures over a pre-determined time interval. If this is done, then the relative phases of the radiation emanating from the exit apertures will change and so the spatially noise-like radiation pattern from the illuminator will also change.

20

25

Alternatively, the plurality of different radiation field states may be generated simultaneously. This may be done by, for example by incorporating a plurality of primary sources towards the baffle and reflector, or alternatively may be done using a single source by radiating from towards the baffle and reflector at at least a first and a second location, whilst arranging that radiation at the first location is incoherent with that at the second location. This may be achieved by incorporating an appropriate relative time delay between radiation reaching the two locations from the source.

30



Preferably the system is arranged to generate the radiation field states such that a plurality of modes are generated within a basic integration time period of an associated imager viewing the scene. In general the integration time period will correspond to the time taken for the imager to measure a pixel of information. For certain classes of imager however, particularly those that

comprise an unscanned staring array of receive elements, this integration time may also correspond to the time taken to record a whole image frame. Preferably the system is arranged to generate radiation field states such that during each basic integration time period of the imager, the scene is illuminated by at least two, such as at least four, such as at least eight radiation field states from the illuminator. In this manner the changing modes will tend to produce an averaging effect, wherein the apparent illumination when integrated over the basic integration time of the imager will appear to be relatively constant.

A preferred system will incorporate the baffle and the reflecting surface into a container, with radiation from the source or sources being emitted into the container.

The means for generating a plurality of radiation field states over a pre-determined time interval may comprise a means for changing the internal dimensions of the container. As at least some of the radiation that emerges from the exit apertures will be reflected from reflective material on the inside of the container, then changing the dimensions of the container by a sufficient extent will change the properties of the reflected radiation, and so change the radiation field state within the container.

Alternatively or as well, the means for generating a plurality of radiation field states over a pre-determined time interval may comprise a movable structure within the container, that disturbs the electromagnetic field, and so changes the radiation field state within the container. The moving structure may be reflective, absorptive or a dielectric.

Alternatively or as well, the means for generating a plurality of radiation field states over a pre-determined time interval may comprise changing the effective position within the container of the output of the primary source .

- 5 This may be done by physically moving the source output within the container, or may be done by switching the radiation from the primary source through to different outputs positioned at different positions within the container.

Alternatively or as well, the means for generating a plurality of radiation field states over a pre-determined time interval may comprise a plurality of,

- 10 effectively, single sources, all simultaneously generating a radiation field state. These may be physically independent sources, or may comprise a single source with a plurality of outputs, each arranged to be incoherent with respect to each other.

- 15 Note that in the context of the current description a transmission mode shall be taken to be the pattern at a given instant of the electromagnetic field distribution on either side of the baffle, generated by effectively a single source.

- 20 Note that in the context of the current description a resonant field state shall be taken to be a standing wave pattern of electromagnetic wave radiation set up between the reflective surface, the source and the baffle and extending through the apertures of the baffle, as defined by the relative positions of the surface, source and baffle and the frequencies of the radiation, generated  
25 effectively by a single source.

Under most circumstances a single source will generate a radiation field state that can remain substantially constant over a period of time longer than that of the basic integration time. However, a physical single source can act as  
30 effectively more than one source in terms of radiation field states generated by means of having multiple outputs that are delayed with respect to each other by more than a coherence length of the radiation being emitted. In this instance, more than one radiation field state will be generated.

According to a further aspect of the current invention there is provided a method of generating millimetre wave illumination comprising the steps of:

feeding millimetre wave radiation from at least one source towards a  
5 reflecting surface and a baffle, the baffle comprising a non transmissive  
surface and having positioned therein a plurality of transmissive exit --  
apertures, such that the reflecting surface induces a plurality of radiation paths  
between the source and the baffle;

generating a plurality of radiation field states between the source and  
10 the exit apertures over a pre-determined time interval.

The invention will now be described in more detail, by way of example only,  
with reference to the following Figures, of which:

15

Figure 1 diagrammatically illustrates a prior art illuminator system;

Figure 2 diagrammatically illustrates a first embodiment of the current  
invention wherein a container housing the output of a primary source is  
20 arranged to have variable internal dimensions;

25

Figure 3 diagrammatically illustrates how changes to the internal geometry of  
the container of the first embodiment can result in a differing spatial  
illumination variation.

Figure 4 diagrammatically illustrates a second embodiment of the current  
invention wherein a container housing the output of a primary source  
incorporates a moveable structure for disturbing an electromagnetic field  
within the container;

30

Figure 5 diagrammatically illustrates a fourth embodiment of the current  
invention wherein a primary source within a container is arranged to have a

plurality of outputs along with switching means for selecting a particular output;

5 Figure 6 shows a graph of the spatial variation in illumination power seen for various individual output positions of a primary source within a container, along with the sum of these.

10 Figure 7 diagrammatically illustrates a fifth embodiment of the current invention wherein a primary source is arranged to have a plurality of outputs, continuously providing energy, wherein one or more of the outputs incorporates phase shifting means.

15 Figure 8 diagrammatically illustrates sixth embodiment of the current invention, wherein multiple independent sources are employed.

Figure 9 diagrammatically illustrates a seventh embodiment of the current invention wherein a single source is operated so as to effectively act as a plurality of sources.

20 Figure 1 shows a mm-wave primary source 1 such as an amplified noise source having an output 2 positioned within a container 3. The container 3 has a metallic internal surface, which is generally reflective at wavelengths produced by the primary source 1. At least one side 5 of the container 3 is formed with a baffle comprising an array of circular through holes or apertures 4, six of which (4a-4f) are visible in Figure 1. The array will generally  
25 comprise a two dimensional array. The output 2 of the source 1 is positioned within the container 3 such that most of the radiation emitted from the output 2 undergoes at least one reflection from the reflective internal surface of the container 3 before exiting the container from the exit apertures 4.

30 The complex nature of the path taken by most of the radiation within the container 3 ensures that, for radiation having a high bandwidth (typically 5-10 GHz) there is a sufficient degree of incoherence of the radiation exiting any

adjacent apertures. This helps to provide a spatially substantially constant level of illumination. As the system bandwidth falls however, the coherence length of the radiation increases, meaning that the degree of coherence of the radiation exiting any adjacent apertures will increase, leading to spatial variations in the level of illumination delivered by the illumination system.

Figure 2 shows a first embodiment of the current invention. Primary source 1 is connected to container 6 such that the output of source 1 is within the container 5, as shown in Figure 1. The container 6 is generally similar to that shown in Figure 1 but is arranged such that one internal wall 7 is able to flex when driven by an actuator 8. Actuator 8 has a connection rod 9 coupled to the wall 7, and this connection rod 9 moves in and out as indicated by the arrows. Such movement of the rod 9 will cause the wall 7 to move, as shown in exaggerated form in Figure 2. Typically, flexure of the wall 7 of even as little as a millimetre is sufficient to change the radiation field state or states within the container enough to have the effect of changing the radiation power spatial variation from the illumination system. Although actuator 8 is shown positioned outside the container 6, it may equally well be positioned within the container 6.

The actuator is preferably arranged to flex the wall 7 repeatedly at a rate such that the modes change a plurality of times within a basic integration time period of an associated imager. The different spatial patterns created by the flexure will then be integrated by the detectors within the imager itself, leading to an averaging of the spatial variation, and therefore no additional processing will be required within the imager.

If a change in the modal structure of the radiation happens only once for each integration time period of the imager, then a plurality of images can be recorded and digitally processed to integrate the series of images. This is not preferred however as it will reduce the effective frame rate of the imaging system, and also require additional processing to be carried out.

Figure 3 shows two possible paths of waves within the container 6 emitted from the output of primary source 1 (as shown in Figure 2), the waves being emitted with a short time interval between each during which the wall 7 has flexed due to the movement of actuator 8. Path A shows the direction of a wave at a given instant reflecting from wall 7, the wall being moved by actuator 8. Path B, initially following the same path as path A hits the same part of the wall 7' at a later instant, and gets reflected in a different direction due to the different position and/or angle of that part of the wall 7. Although a simplistic representation, Figure 3 shows how a relatively slight movement of wall 7 can have significant effects on the resultant spatial illumination pattern.

Figure 4 shows a second embodiment of the current invention. Here, a primary source 1 again has an output 2 that feeds into a container 10. The container 10 is similar to that shown in Figure 1, having exit apertures 4, and metallic inside walls. However, in this embodiment the container 10 also contains an electric motor 11 coupled to a skew-mounted metallic disk 12. The disk 12 is mounted such that it is in the path of at least some of the radiation from output 2. In practice, the disk can be mounted in any convenient location within the container 10.

The motor 11 is arranged to rotate the disk 12 when the illuminator is in use. Radiation that hits the disk will then be reflected away according to the position of the disk at that instant. As the disk rotates the radiation will reflect within the container 10 in different modes, and so the illumination spatial variation will be continuously changing. The motor is preferably arranged to rotate at a rate high enough to ensure that the modal change within the container 10 results in changes to the spatial variation of the illuminator output in a time shorter than the basic integration period of the associated imager.

Although Figure 4 shows a motor coupled to a skew-mounted reflector 12, the scope of the invention is broad enough to encompass other means of "stirring" the modes within the container 10. For example, the reflector 12 can be replaced with a skew mounted dielectric slab, or even an absorber. All of

these will affect the modal structure present in the container. Alternatively, the motor 11 and reflector 12 can be replaced with a mirror, or dielectric, or absorber attached to a linear actuator similar to actuator 8 in Figure 2.

5

Figure 5 shows a fourth embodiment of the current invention. A primary source 1 is shown connected to a container 10, the container 10 being generally similar to that of the container 10 of Figure 4. The output of source 1 feeds into a millimetre wave switch box 13 that has four individual outputs 10 14a-14d. Switching circuitry within the switch box is able to select which of the four outputs 14 the millimetre wave energy from the source is directed towards. The switch box 13 is preferably a P.I.N diode switched device, as this is capable of switching very rapidly. Millimetre wave switches suitable for this application are manufactured by Millitech, based at Northampton, MA 15 01060, USA. Electromechanical switches are also suitable for implementing this embodiment, but cannot switch as rapidly.

In use, the primary source 1 provides millimetre wave energy to the switch box 13 which, at any given time, is arranged to direct the energy to one of the 20 four outputs 14. Output 14d is shown emitting radiation in Figure 5. The switch box is arranged to switch the radiation from the source 1 through to each output 14a-14d in turn. As each output 14a-14d are in separate locations then the radiation field states within the container 10 for each output 4a-4d will generally be different, and so will result in a different spatial 25 variation on the output of the illuminator. If the switch is arranged to cycle radiation through every output 4a-4d at least once during a basic integration time period of an associated imager, then these different spatial variations on the output of the illuminator will tend to be averaged in the imager, as takes place with the other embodiments of the invention discussed herein.

30

It has been found convenient with the implementation of this embodiment of the invention to put variable attenuators on each the outputs 14a-14d. This is because the output power radiated by the illuminator system can vary slightly

depending upon which output 14a 14d is currently active. The attenuators allow the output power from each output 14a-14d to be tuned such that a more uniform output is obtained from the illuminator system.

5 Figure 6 is a graph showing the results from the fourth embodiment. The graph indicates the percentage contrast measured on an imaging system with horizontal position in an image, indicated by pixel position. The image from which the data is taken is of a uniformly reflecting scene illuminated by the illuminator of the fourth embodiment, as illustrated in Figure 5. Thus the  
10 graph shows the spatial variation in illumination of the scene.

Five traces are shown. Traces A, B, C and D equate to the image contrast when the scene is illuminated by the four individual outputs 14a, 14b, 14c and 14d respectively of the fourth embodiment. Trace E is a measurement taken  
15 by the imager of the scene illuminated by all four outputs in turn, each for a quarter of the measurement time accorded to traces A, B, C and D. Note that the traces A, B, C, D, E have been repositioned in absolute terms to make the graph clearer, and so their positions on the y-axis of the graph are not meaningful. However, the y-axis is useful for seeing the amount of contrast  
20 variation within a single trace.

By merely looking at the traces it can be seen that the amount of spatial variation in illumination is similar for each of the traces A, B, C, D, but that the exact form of these traces is different in each case. The variation in trace E,  
25 where all four individual outputs 14a, 14b, 14c and 14d were used to illuminate the scene, show a much reduced spatial variation in illumination intensity, and thus a much more even illumination of the scene. The variation reduction has been calculated to be proportional to  $\sqrt{n}$ , where n is the number of individual illuminators used to illuminate the scene. The measured results  
30 match this theoretical prediction. This equation has been found to hold more generally for the other embodiments also, where n equates to the number of independent illumination patterns produced within the basic integration time of an associated imager.



Figure 7 shows a fifth embodiment of the current invention. A primary source 1 is shown connected to a container 10, the container 10 being generally similar to that of the container 10 of Figure 4. The output of source 1 feeds into a power-divider-15, that splits the radiation from the primary source 1 into a first path 16 and a second path 17, each having approximately half the power of the original source. Radiation in the first path 16 is emitted into the container 10 as normal, through port 18. Radiation in the second path 17 passes through a variable phase shifter 19 before exiting through port 20.

The variable phase shifter is arranged to rapidly and continuously vary the phase of the radiation passing through it. The radiation from the two ports 18, 20 will combine vectorially within the container 10 to effectively steer the radiation in a particular direction within the container 10, and so produce, at a given instant, a radiation field state. Shortly afterwards, the phase shift induced into one path 17 of the radiation will steer the radiation in a different direction, and so result in a different radiation field state within the container 10. Each direction steered will generally result in a different radiation pattern produced by the illumination system, leading to the benefits discussed above. Similar embodiments may incorporate more than two ports 18, 20, and more than one phase shifter 19.

Figure 8 shows a sixth embodiment of the current invention. A container 10 is shown, generally similar to the container 10 of Figure 4. However, instead of a single primary source feeding energy into the container 10, three independent primary sources 21a, 21b, 21c are arranged to feed energy into the chamber 10. The sources 21 are arranged to work simultaneously, so that all three may radiate energy into the container 10 at a given instant. The power of each source 21a, 21b, 21c may be adjusted such that the output power of the illuminator due to each source 21a, 21b, 21c is substantially equal. This may be achieved by incorporating attenuators into the feeds 22 of the sources, or by any other suitable means. As the sources 21 are mutually

incoherent, then each will be associated with its own spatial variation on the output of the illuminator, but each such variation will be different. The superposition of the three spatial variations will tend to smooth the overall output power as described in relation to other embodiments above.

5

Figure 9 shows a seventh embodiment of the current invention. A primary source 1 is shown connected to a container 10, the container 10 being generally similar to that of the container 10 of Figure 4. The output of source 1 feeds into a power divider 23, that splits the radiation from the primary  
10 source 1 into a first waveguide path 24 having exit port 26 and a second waveguide path 25 having an exit port 27, each having approximately half the power of the original source. The length of the path 25 is longer than that of the path 24, so as to introduce a time delay between radiation exiting from exit port 26 and that exiting from exit port 27. This time delay must be sufficiently  
15 large such that radiation exiting from exit port 26 is incoherent with respect to that exiting from exit port 27. In practice, this means that the distance difference between the two paths 24, 25 should be greater than the coherence length of the radiation when travelling in the waveguide paths 24, 25, and this coherence length is dependent upon the system bandwidth.

20

The effect of the arrangement of Figure 9 is to make the radiation exiting ports 26 and 27 behave as if it is derived effectively from independent sources. Thus, the benefits of the multiple source approach as described in the embodiment of Figure 8 are gained using only a single source.

25

The skilled person will be aware that other embodiments within the scope of the invention may be envisaged, and thus the invention should not be limited to the embodiments as herein described. For example, in addition to the embodiments already described, the plurality radiation field states be  
30 generated in a pre-determined time by varying the physical characteristics of the baffle. This may be achieved by providing exit apertures that may be dynamically opened and closed within the pre-determined time.

## Claims

1. A millimetre wave illumination system comprising:  
at least one primary source of mm-wave radiation adapted to emit mm-  
5 wave radiation in at least one radiation field state;  
a baffle comprising a non transmissive surface and having positioned therein  
a plurality of transmissive exit apertures;  
a surface reflective at millimetre wavelengths for inducing a plurality of  
radiation paths between the source and the baffle;  
10 characterised in that the system further incorporates means for generating a  
plurality of radiation field states in a pre-determined time interval.
2. An illumination system as claimed in claim 1 wherein the means for  
generating the radiation field state or states is arranged to change the  
15 radiation field state or states within a time shorter than a basic integration  
period of an associated imaging system.
3. An illumination system as claimed in claim 1 or claim 2 wherein the  
baffle and the reflective surface form a part of a container, and the at least  
20 one source is arranged to emit radiation into the container.
4. An illumination system as claimed in any of claims 1 to 3 wherein the  
means for changing the radiation field state or states includes a mechanical  
actuator attached such that it is capable of moving the reflective surface.  
25
5. An illumination system as claimed in any of claims 1 to 3 wherein the  
means for changing the radiation field state or states incorporates a moveable  
structure for disturbing an electromagnetic field between the source and the  
baffle.  
30
6. An illumination system as claimed in claim 5 wherein the moveable  
structure comprises a reflective material.

7. An illumination system as claimed in claim 5 wherein the moveable structure comprises an absorptive material.

5 8. An illumination system as claimed in claim 8 wherein the moveable structure comprises a dielectric material.

9. An illumination system as claimed in any of claims 1 to 3 wherein the means for changing the radiation field state or states comprises means for changing the effective point at which the primary source provides an output of radiation towards the baffle and the reflective surface.

10. An illumination system as claimed in claim 9 wherein the means for changing the effective point at which the primary source provides an output of radiation comprises a primary source output adapted to be moveable with respect to the reflecting surface and the baffle.

11. An illumination system as claimed in claim 9 wherein the means for changing the effective point at which the primary source provides an output of radiation comprises a switch arranged to switch radiation from the primary source to one of a plurality of spatially separate outputs.

12. A method of generating millimetre wave illumination comprising the steps of:

25 feeding millimetre wave radiation from at least one source towards a reflecting surface and a baffle, the baffle comprising a non transmissive surface and having positioned therein a plurality of transmissive exit apertures, such that the reflecting surface induces a plurality of radiation paths between the source and the baffle;

30 generating a plurality of radiation field states between the source and the exit apertures over a pre-determined time interval.


Abstract

Improved Millimetre Wave Illumination System

An improved millimetre wave illumination system includes at least one primary source of millimetre wave radiation, a reflecting surface and a baffle comprising a plurality of exit apertures arranged such that at least some of the radiation from the source is reflected from the reflective surface before proceeding to the baffle, characterised in that means are incorporated for generating a plurality of radiation field states within a pre-determined time interval. The baffle, source and reflector are preferably packaged into a container with the exit apertures providing an illumination output. The generation of the plurality of radiation field states provides an illumination at the illuminator output that is less spatially variable when integrated over the pre-determined time interval. Embodiments of the invention show means for generating the plurality of radiation field states including relative movement of the reflective surface, variable positioning of the source with respect to the reflective surface, and including multiple sources within a single system.

(Figure 5)


Fig. 1.

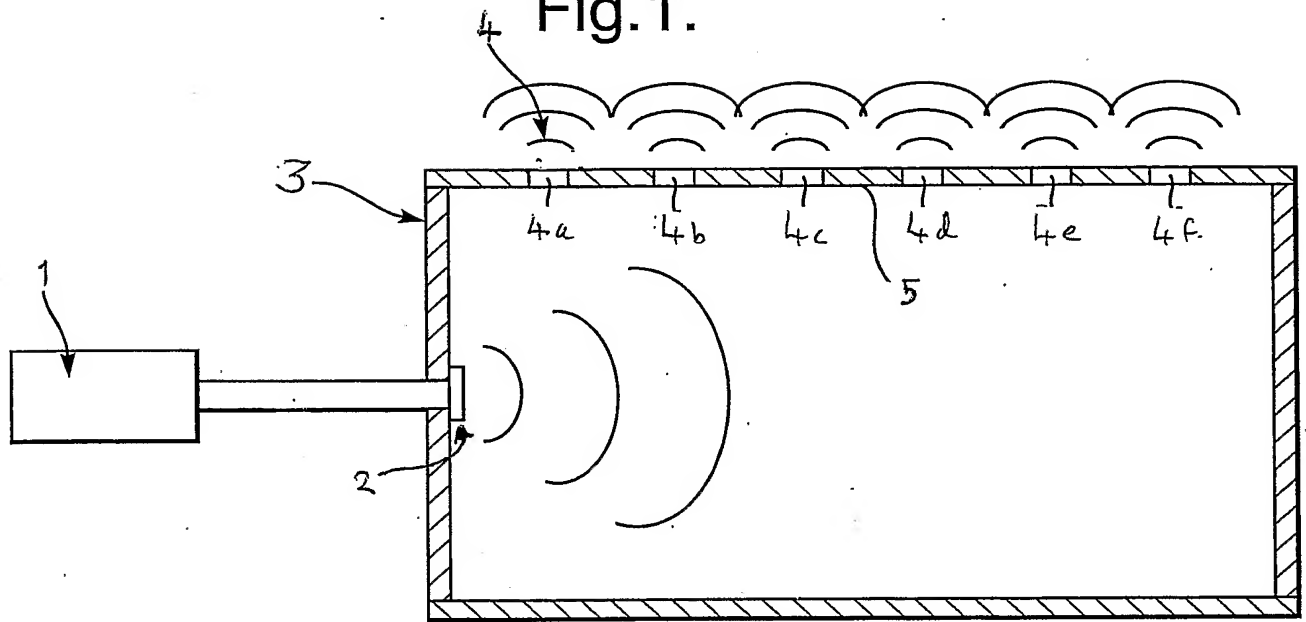

**NOT TO BE AMENDED**



Fig. 2

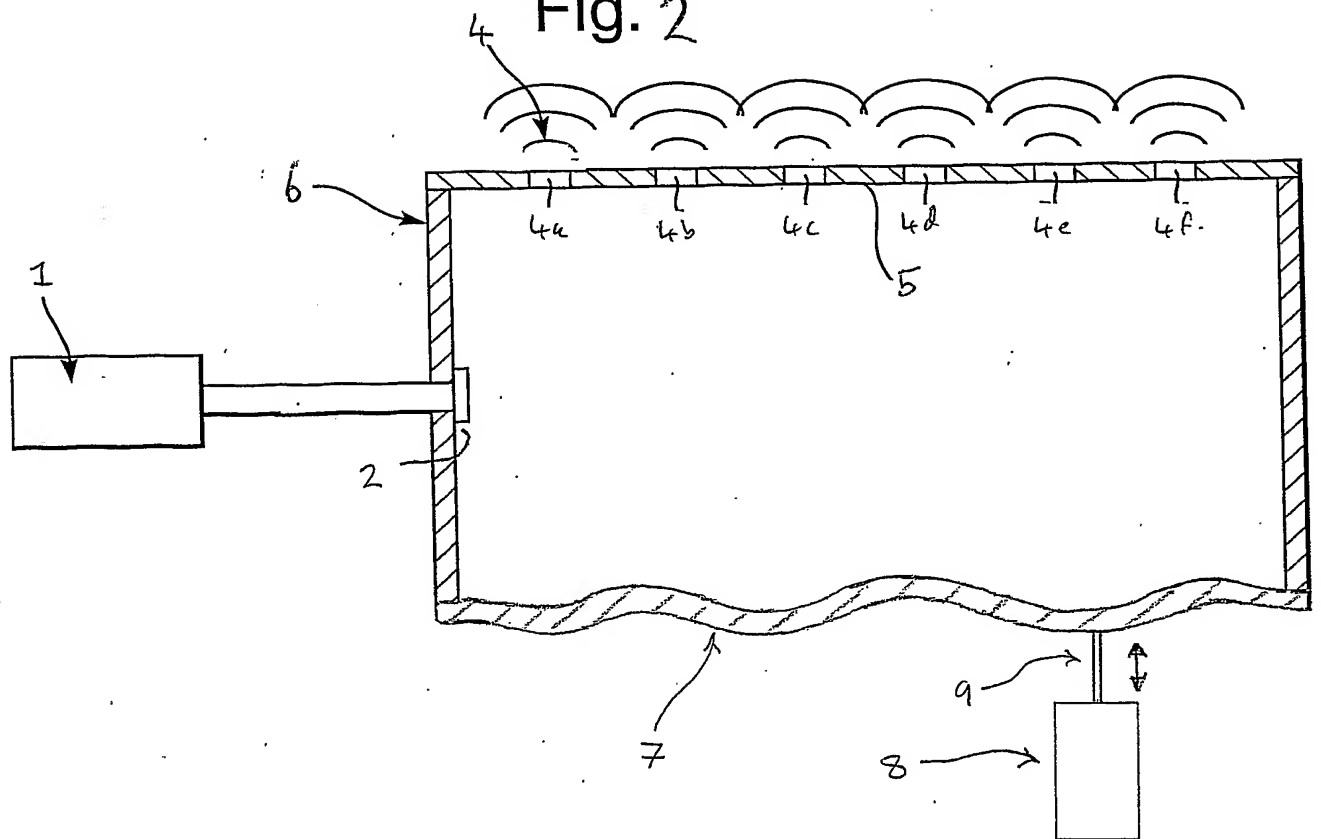


NOT TO BE AMENDED






Fig. 3

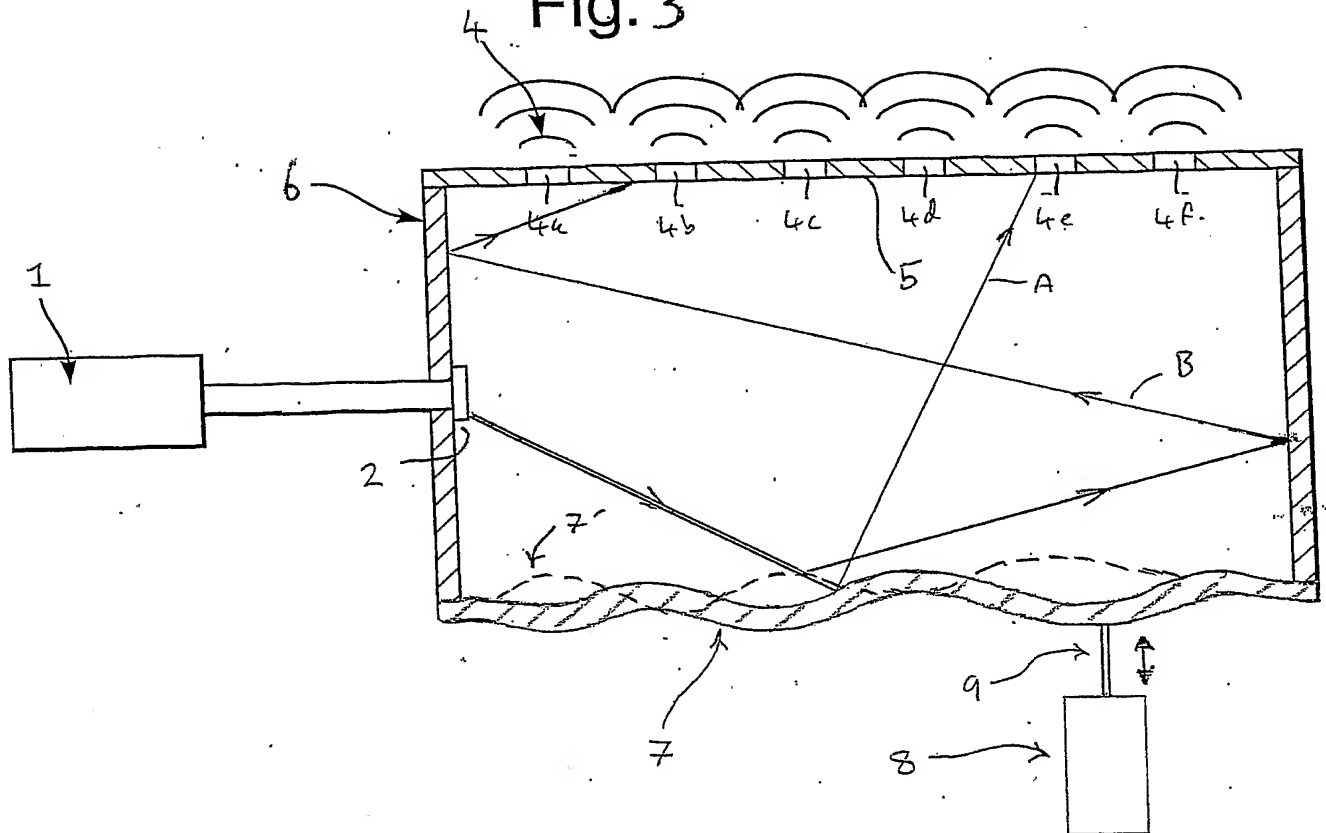

NOT TO BE AMENDED




Fig. 4

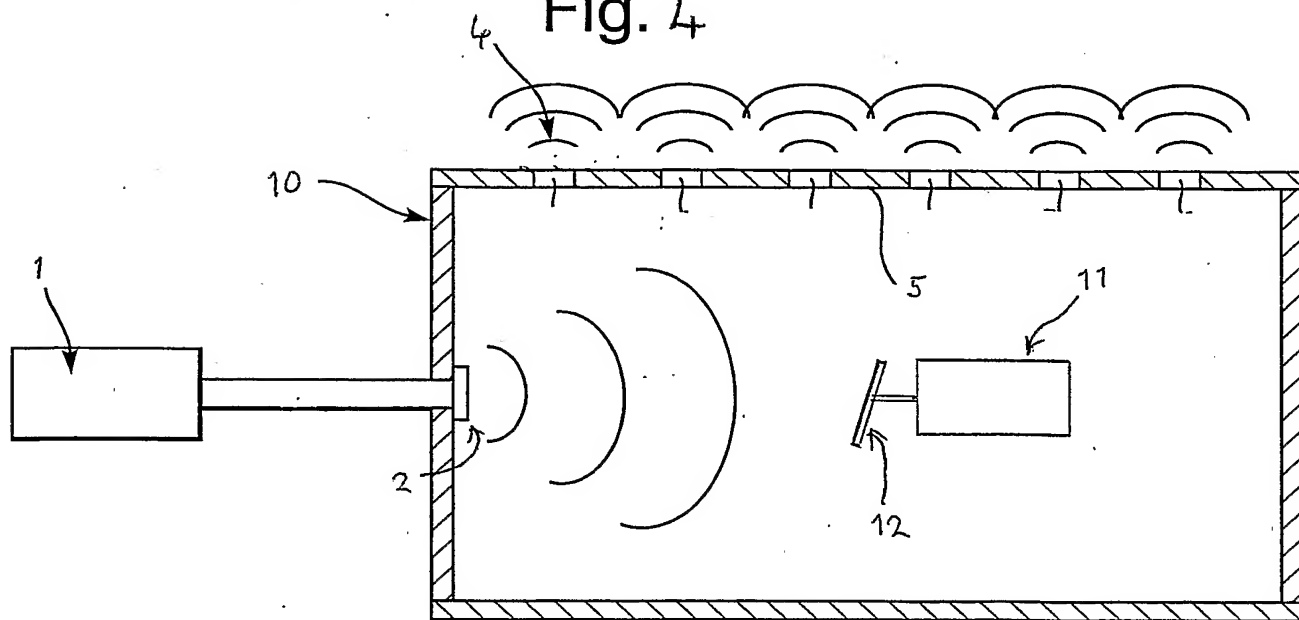

NOT TO BE AMENDED



Fig. 5

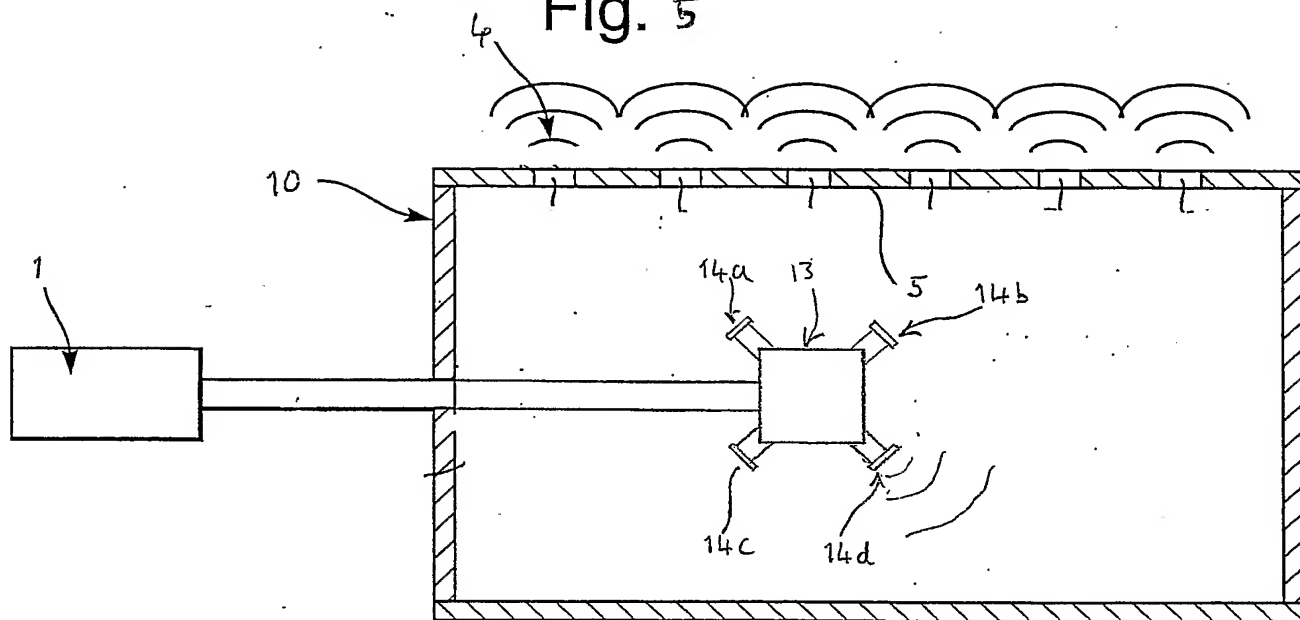

NOT TO BE AMENDED



6/3

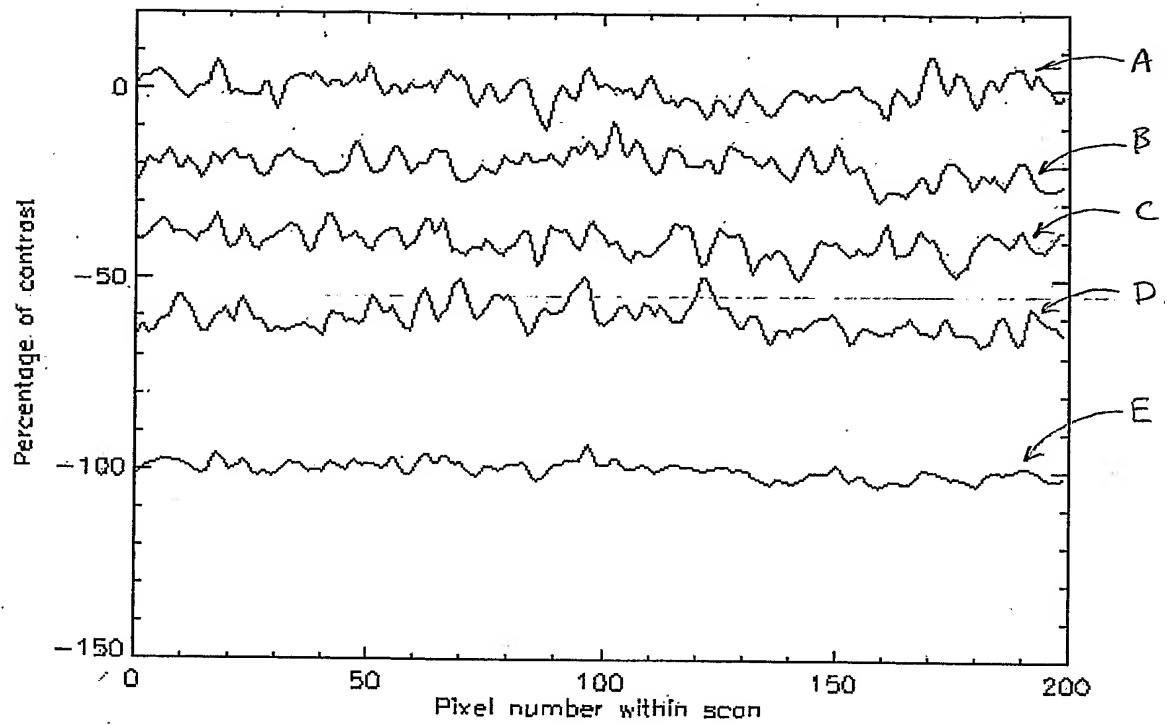



Figure 6

NOT TO BE AMENDED





Fig. 7

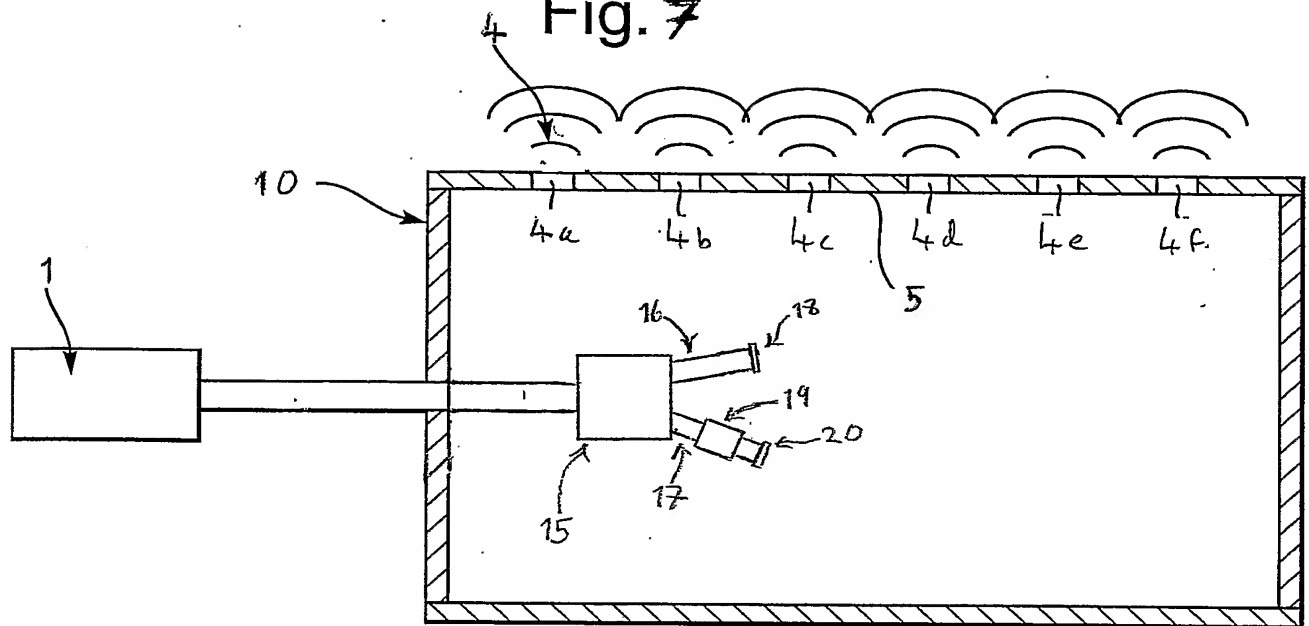

NOT TO BE AMENDED



Fig. 8

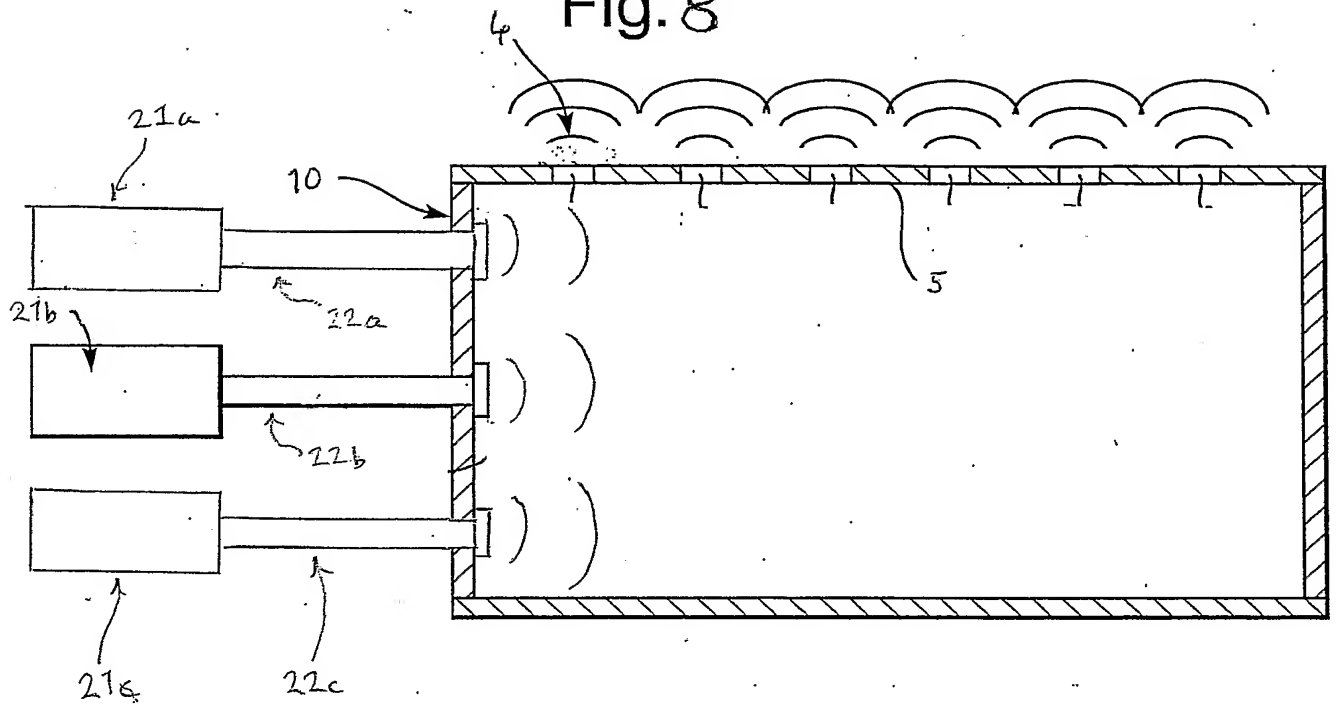


Fig. 9

